

REVISIONS

LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED

REV																				
SHEET																				
REV																				
SHEET																				


REV STATUS OF SHEETS	REV																			
	SHEET	1	2	3	4	5	6	7	8											

<b>PMIC N/A</b>  <b>STANDARDIZED MILITARY DRAWING</b>  <small>THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE</small>  <small>AMSC N/A</small>	PREPARED BY Rick C. Officer	DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444																				
	CHECKED BY Charles E. Besore																					
	APPROVED BY Michael A. Frye	MICROCIRCUIT, LINEAR, POSITIVE 10-VOL ADJUSTABLE PRECISION VOLTAGE REFERENC MONOLITHIC SILICON																				
	DRAWING APPROVAL DATE 11 JANUARY 1990																			SIZE A	CAGE CODE 67268	<b>5962-8947!</b>
	REVISION LEVEL																			SHEET 1 OF 8		

1. SCOPE

1.1 Scope. This drawing describes device requirements for class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

1.2 Part number. The complete part number shall be as shown in the following example:

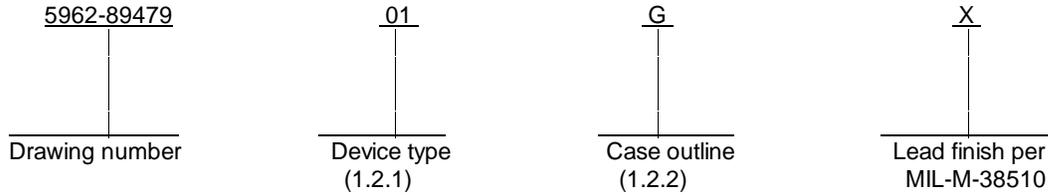

1.2.1 Device types. The device type shall identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	REF10A	Precision reference +10 volt adjustable output, with guaranteed long-term stability
02	REF10B	Precision reference +10 volt adjustable output, with guaranteed long-term stability

1.2.2 Case outlines. The case outlines shall be as designated in appendix C of MIL-M-38510, and as follows:

<u>Outline letter</u>	<u>Case outline</u>
G	A-1 (8-lead, .370" x .185"), can package

1.3 Absolute maximum ratings.

Input voltage ( $V_{IN}$ )	-----	40 V dc
Power dissipation ( $P_D$ )	-----	500 mW <u>1/</u>
Output short circuit duration	-----	Indefinite
Storage temperature	-----	-65° C to +150° C
Lead temperature (soldering, 10 seconds)	-----	300° C
Junction temperature ( $T_J$ )	-----	+150° C
Thermal resistance, junction-to-case ( $\Theta_{JC}$ ):	-----	See MIL-M-38510, appendix C

1.4 Recommended operating conditions.

Ambient operating temperature range ( $T_A$ )	----- -55° C to +125° C
---	-------------------------

1/ Derate above 80° C, 7.1 mW/° C

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>	5962-89479
	REVISION LEVEL	SHEET <b>2</b>

2. APPLICABLE DOCUMENTS

2.1 Government specification, standard, and bulletin. Unless otherwise specified, the following specification, standard, and bulletin of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

BULLETIN

MILITARY

MIL-BUL-103 - List of Standardized Military Drawings (SMD's).

(Copies of the specification, standard and bulletin required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the part number listed in 1.2 herein. In addition, the manufacturer's part number may also be marked as listed in MIL-BUL-103 (see 6.6 herein).

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		<b>5962-89479</b>
		REVISION LEVEL	SHEET <b>3</b>

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions 1/ -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Device type	Group A subgroups	Limits		Unit
					Min	Max	
Quiescent supply current	I <sub>SY</sub>	No load	All	1		1.4	mA
				2, 3		2.0	
Output adjustment range	delta V <sub>TRIM</sub>	R <sub>P</sub> = 10 kΩ, T <sub>A</sub> = +25°C	All	1	±3.0		%
Output voltage	V <sub>OUT</sub>	I <sub>L</sub> = 0 mA	01	1	9.97	10.03	V
			02		9.95	10.05	
			01	2, 3	9.95	10.04	
			02		9.905	10.09	
Short circuit current	I <sub>OS</sub>	V <sub>O</sub> = 0 V, T <sub>A</sub> = +25°C	All	1	+15	+60	mA
Sink current	I <sub>S</sub>	T <sub>A</sub> = +25°C	All	1	-0.3		mA
Load regulation	LD reg	I <sub>L</sub> = 0 to 10 mA 2/ 3/	01	1		0.008	%mA
			02			0.010	
		I <sub>L</sub> = 0 to 8 mA 2/ 3/	01	2, 3		0.012	
			02			0.015	
Line regulation	LN reg	V <sub>IN</sub> = 13 V to 33 V 2/	All	1		0.01	%V
		V <sub>IN</sub> = 13 V to 33 V 2/	All	2, 3		0.015	
Load current	I <sub>L</sub>	4/	All	1	10		mA
				2, 3	8		
Output voltage noise	e <sub>np-p</sub>	0.1 Hz to 10 Hz	All	4		30	μVp-p
Output voltage temperature coefficient	TCV <sub>O</sub>	5/	01	5, 6		+8.5	ppm/ °C
			02			+25	
Long term stability	delta V <sub>OUT</sub> / delat t		All	6/		50	ppm/ 1 kHR

See footnotes on next page.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		<b>5962-89479</b>
		REVISION LEVEL	SHEET <b>4</b>

1/  $V_{IN} = 15 \text{ V}$ .

2/ Line and load regulation specifications include the effect of self-heating.

3/  $Ld_{reg} = I_L/V_{OUT} \times 100$ .

4/ Minimum of 10 mA load current guaranteed by load regulation test.

5/  $TCV_O = \frac{|V_{MAX} - V_{MIN}|}{10 \text{ V}} (-55^\circ \text{C to } +125^\circ \text{C}) 1/180^\circ \text{C} \times 10^6$ .

6/ Each wafer lot is tested for long-term stability at a chip temperature of  $76^\circ$  for 168 hours.  
(SS = LTPD 5/2).

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-BUL-103 (see 6.6 herein). The certificate of compliance submitted to DESC-ECS prior to listing as an approved source of supply shall state that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DESC-ECS shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.9 Verification and review. DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

#### 4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).

(2)  $T_A = +125^\circ \text{C}$ , minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		<b>5962-89479</b>
		REVISION LEVEL	SHEET <b>5</b>

Device types	01 and 02
Case outlines	G
Terminal number	Terminal Symbol
1	NC
2	V <sub>IN</sub>
3	NC
4	GND
5	TRIM
6	V <sub>OUT</sub>
7	NC
8	NC

NC = no connection

FIGURE 1. Terminal connections.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		<b>5962-89479</b>
		REVISION LEVEL	SHEET <b>6</b>

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table I)
Interim electrical parameters (method 5004)	1, 2, 3
Final electrical test parameters (method 5004)	1*, 2, 3, 4
Group A test requirements (method 5005)	1, 2, 3, 4, 5, 6
Groups C and D end-point electrical parameters (method 5005)	1,2, 3

\* PDA applies to subgroup 1 and 7.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroups 7, 8, 9, 10 and 11 in table I, method 5005 of MIL-STD-883, shall be omitted.

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
  - (1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).
  - (2)  $T_A = +125^\circ\text{C}$ , minimum.
  - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		<b>5962-89479</b>
		REVISION LEVEL	SHEET <b>7</b>

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

6.2 Replaceability. Replaceability is determined as follows:

- a. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.
- b. When a QPL source is established, the part numbered device specified in this drawing will be replaced by the microcircuit identified as part number M38510/12403BGX.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-481 using DD Form 1693, Engineering Change Proposal (Short Form).

6.4 Record of users. Military and industrial users shall inform Defense Electronics Supply Center when a system application requires configuration control and the applicable SMD. DESC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DESC-ECS, telephone (513) 296-6022.

6.5 Comments. Comments on this drawing should be directed to DESC-ECS, Dayton, Ohio 45444, or telephone 513-296-5375.

6.6 Approved source of supply. An approved source of supply is listed in MIL-BUL-103. Additional sources will be added to MIL-BUL-103 as they become available. The vendor listed in MIL-BUL-103 has agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DESC-ECS. The approved source of supply listed below is for information purposes only and is current only to the date of the last action of this document.

Military drawing part number	Vendor CAGE number	Vendor similar part number <u>1/</u>	Replacement military specification part number
5962-8947901GX	06665	REF10AJ/883C	M38510/12403BGX
5962-8947902GX	06665	REF10BJ/883C	

1/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE  
number

06665

Vendor name  
and address

Precision Monolithic Inc.  
1500 Space Park Dr.  
P. O. Box 58020  
Santa Clara, CA 95050-8020

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		<b>5962-89479</b>
		REVISION LEVEL	SHEET <b>8</b>