

Preliminary Technical Data

2/25/00

AD9433

The AD9433 is a 12-bit monolithic sampling analog-to-digital converter with an on-chip track-and-hold circuit and is designed for ease of use. The product operates up to 125 Msps conversion rate and is optimized for outstanding dynamic performance in wideband and high IF carrier systems.

The ADC requires a +5V and a +3.3V power supply and a differential encode clock for full performance operation. No external reference or driver components are required for many applications. The digital outputs are TTL/CMOS compatible and a separate output power supply pin supports interfacing with 3.3V or 2.5V logic.

A user selectable on-chip dithering allows maximum SFDR performance of 90dBc from DC to 250MHz. An IF band select allows optimized SINAD vs SFDR for a particular carrier frequency.

The encode clock supports either differential or single-ended input and is PECL compatible. Immunity to clock duty cycle variations and an output data format select option of two's complement or offset binary are also supported.


Fabricated on an advanced BiCMOS process, the AD9433 is available in a 52 pin surface mount plastic package (52 LQFP) specified over the industrial temperature range (-40°C to +85°C) and is pin compatible with the AD9432.

FEATURES

IF Sampling up to 350MHz
IF band select for optimized SINAD and SFDR
On-chip reference and track/hold
Scalable voltage reference
Selectable dither for improved SFDR & THD
Excellent Linearity:
 - DNL = +/- 0.3 lsb (typ)
 - INL = +/- 0.6 lsb (typ)
700 MHz Full Power Analog Bandwidth
SNR = 68dB @ Fin up to Nyquist
SFDR = 90dBc @ Fin up to 250 MHz
THD = 90dBc @ Fin up to 250 MHz
Power dissipation = 1.1W typical at 125Mps
Input voltage of 1Vp-p or 2Vp-p
Two's complement or Straight binary data format
+5.0V and +3.3V Supply Operation
+2.5V to 3.3V TTL/CMOS outputs
Clock Duty Cycle Stabilizer.

APPLICATIONS

Wireless and Wired Broadband Communications
 - Wideband carrier frequency systems
Communications Test Equipment
 "IF Sampling" schemes
Radar and Satellite sub-systems

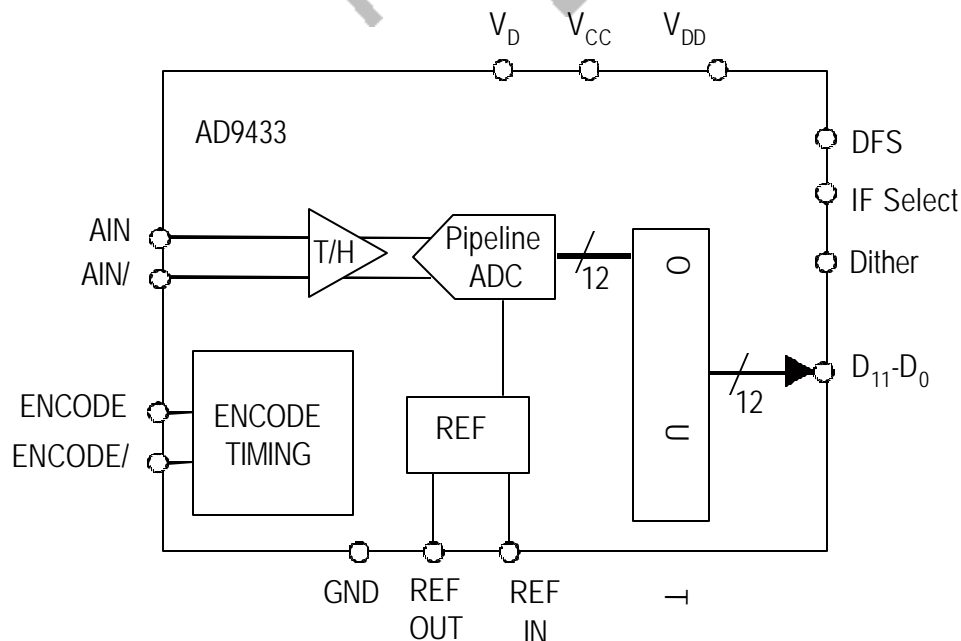

REV PrB

© Analog Devices, Inc., 2000

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, USA
 Tel: 617/329-4700
 Fax: 617-326-8703

AD9433—TARGET SPECIFICATIONS

ELECTRICAL CHARACTERISTICS ($V_{DD} = 3.0V$, $V_{CC} = 5.0V$; external reference; ENCODE = 125 Msps, unless otherwise noted)

Parameter	Temp	Test Level	AD9433BST-125			Units
			Min	Typical	Max	
RESOLUTION			12			bits
DC ACCURACY						
Differential Nonlinearity	+25°C	I	-0.6	±0.3	+0.6	LSB
	Full	VI				LSB
Integral Nonlinearity	+25°C	I		±0.75		LSB
	Full	VI				LSB
No Missing Codes	Full	VI	Guaranteed			
Gain Error ¹	+25°C	I		±1		% FS
	Full	VI				% FS
Gain Tempco ¹	Full	V		150		ppm/°C
ANALOG INPUT						
Input Voltage Range (with respect to AIN\)	Full	V		±1.0		V p-p
Common Mode Voltage	Full	V		3.0		V
Input Offset Voltage	Full	VI		±0		mV
Input Capacitance	+25°C	V		3		pF
Input Resistance	Full	VI	2	3	3	kΩ
Analog Bandwidth, Full Power	+25°C	V		750		MHz
ANALOG REFERENCE						
Reference Voltage	Full	VI	2.4	2.5	2.6	V
Tempco	Full	V		50		ppm/°C
Input Bias Current	Full	VI		15		μA
SWITCHING PERFORMANCE						
Maximum Conversion Rate	Full	VI	125			Msps
Minimum Conversion Rate	Full	IV			10	Msps
Encode Pulse Width High (t_{EH})	+25°C	IV	2	4.0		ns
Encode Pulse Width Low (t_{EL})	+25°C	IV	2	4.0		ns
Aperture Delay (t_A)	+25°C	V		2.0		ns
Aperture Uncertainty (Jitter)	+25°C	V		0.3		ps rms
Output Valid Time (t_V) ²	Full	VI		4.0		ns
Output Propagation Delay (t_{PD}) ²	Full	VI	3.0	5.0	7.0	ns
Output Rise Time (t_R) ²	Full	VI		2.1		ns
Output Fall Time (t_F)	Full	VI		1.9		ns
Output Fall Time (t_F)						
Output Fall Time (t_F)						
DIGITAL INPUTS						
Encode Input Common Mode	Full	V		3.75		V
Differential Input (Enc,Enc) Single Ended	Full	V		500		MVp-p
Logic "1" Voltage	Full	IV	0			V
Logic "0" Voltage	Full	IV			0.9	V
Input Resistance	Full	VI		6		kΩ
Input Capacitance	+25°C	V		3.0		PF
DIGITAL OUTPUTS						
Logic "1" Voltage ($V_{DD} = +3.3V$)	Full	VI	$V_{DD}-0.05$			V
Logic "0" Voltage ($V_{DD} = +3.3V$)	Full	VI			0.05	V
Output Coding			Two's complement or Binary			
POWER SUPPLY						
Power Dissipation ³	Full	VI		1.1		W
Power Supply Rejection Ratio (PSRR)	+25°C	I		±5		mV/V

Parameter	Temp	Test Level	AD9433BST-125			Units
			Min	Typical	Max	
DYNAMIC PERFORMANCE⁴						
Signal-to-Noise Ratio (SNR) (Without Harmonics)						
$f_{IN} = 10 \text{ MHz}$	+25°C	I		68.5		dB
$f_{IN} = 49 \text{ MHz}$	+25°C	I		68		dB
$f_{IN} = 70 \text{ MHz}$	+25°C	I		67		dB
$f_{IN} = 150 \text{ MHz}$	+25°C	I		65		dB
$f_{IN} = 250 \text{ MHz}$	+25°C	I		61.5		dB
Signal-to-Noise Ratio (SINAD) (With Harmonics)						
$f_{IN} = 10 \text{ MHz}$	+25°C	I		68.5		dB
$f_{IN} = 49 \text{ MHz}$	+25°C	I		68		dB
$f_{IN} = 70 \text{ MHz}$	+25°C	I		67		dB
$f_{IN} = 150 \text{ MHz}$	+25°C	I		65		dB
$f_{IN} = 250 \text{ MHz}$	+25°C	I		61.5		dB
Effective Number of Bits						
$f_{IN} = 10 \text{ MHz}$	+25°C	I		11.2		bits
$f_{IN} = 49 \text{ MHz}$	+25°C	I		11.0		bits
$f_{IN} = 70 \text{ MHz}$	+25°C	I		10.8		bits
$f_{IN} = 150 \text{ MHz}$	+25°C	I		10.5		bits
$f_{IN} = 250 \text{ MHz}$	+25°C	I		10.0		bits
Spurious Free Dynamic Range						
$f_{IN} = 10 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 49 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 70 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 150 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 250 \text{ MHz}$	+25°C	I		90		dBc
2 nd & 3 rd Harmonic Distortion						
$f_{IN} = 10 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 49 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 70 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 150 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 250 \text{ MHz}$	+25°C	I		90		dBc
4 th or higher Harmonic Distortion						
$f_{IN} = 10 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 49 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 70 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 150 \text{ MHz}$	+25°C	I		90		dBc
$f_{IN} = 250 \text{ MHz}$	+25°C	I		90		dBc
Two-Tone Intermod Distortion (IMD)						
$f_{IN} = 10 \text{ MHz}$	+25°C	V		Tbf		dBc
$f_{IN} = 20 \text{ MHz}$	+25°C	V		Tbf		dBc
$f_{IN} = 47 \text{ MHz}$	+25°C	V		Tbf		dBc

NOTES

- Gain error and gain temperature coefficients are based on the ADC only (with a fixed 2.5V external reference and 2Vp-p differential input.).
- t_V and t_{PD} are measured from a 1.5V level of the ENCODE input to the 50%/50% levels of the digital outputs swing. The digital output load during test is not to exceed an ac load of 10pF or a dc current of +/-40 μ A.
- Power dissipation measured with encode at rated speed and a dc analog input.
- SNR/harmonics based on an analog input voltage of -0.5dBFS referenced to a 2V full-scale input range. Less than 0.5ps jitter clock sourced used.

Specifications subject to change without notice.